



1" SLIM BATTEN



Panels will be produced with smooth surface (without stiffening), unless an option is marked.

Option for striated stiffening is only available on the SBSF 1000 series*

*MODEL SB1000 -- 1" HIGH SLIM BATTEN IS AVAILABLE AS: SBSF - Straight Flat, SBSR - Straight Radius
SBTF - Tapered Flat, SBTR - Tapered Radius

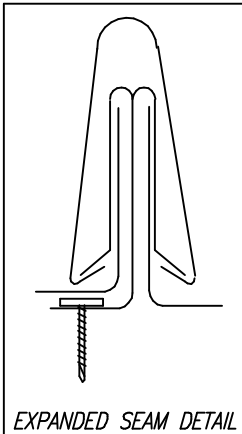

EXPANDED SEAM DETAIL

ADVANTAGES :

- SNAP - ON SLIM BATTEN PERMITS LESS PANEL WASTE AT HIPS AND VALLEYS
- POSITIVE SEAM ENGAGEMENT
- PANEL AND BATTEN CAN BE RADIUS TO 8' MIN. RADIUS
- EXCEEDS 200 lb> SEAM PULL-OFF TEST
- PREVENTS MOISTURE SEEPAGE
- ALLOWS FOR FREEZE-THAW EXPANSION & CONTRACTION

STANDARD PRODUCT OFFERING

SEAM - ON CENTERS

18"

12"

Custom seam on centers available upon request. Consult METAL WORX for more information.

AVAILABLE BASE SHEET MATERIALS

24 Gauge HOT DIPPED GALVANIZED G-90

24 Gauge GALVALUM

.32 ALUMINUM

16 oz. COLD ROLLED COPPER

20 oz. COLD ROLLED COPPER

AVAILABLE FINISH SYSTEM

KYNAR 500 - FLUOROPOLYMER FINISHES ARE STANDARD ON ALL PREFINISHED PRODUCTS.

KYNAR 500® is a registered trademark of Atochem of North America, Inc.
GALVALUM® is a registered trademark of Bethlehem Steel.



metal worx



Systems Inc.

SB1000 Panel