


1 1/2" SNAP LOCK

Panels will be produced with striated stiffening, as shown, unless an option is marked.

Option for smooth surface (NO STIFFENING)

Option for pan stiffeners

MODEL SL 1500 1-1/2" SNAP LOCK

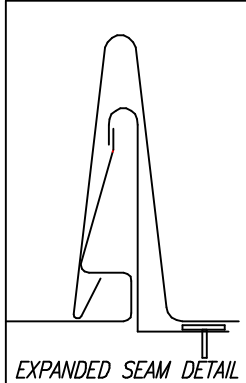

ADVANTAGES :

- POSITIVE SEAM ENGAGEMENT
- CONTINUOUS INTERLOCKING SEAM
- SINGLE EDGE SEAM
- EXCEEDS 200 lb> SEAM PULL-OFF TEST
- PREVENTS MOISTURE SEEPAGE
- ALLOWS FOR FREEZE-THAW EXPANSION & CONTRACTION

STANDARD PRODUCT OFFERING

SEAM - ON CENTERS*

20"

12"

*Custom seam on centers available upon request. Consult METAL WORX for more information.

AVAILABLE BASE SHEET MATERIALS

24 Gauge HOT DIPPED GALVANIZED G-90

24 Gauge GALVALUM

.32 ALUMINUM

16 oz. COLD ROLLED COPPER

20 oz. COLD ROLLED COPPER

AVAILABLE FINISH SYSTEM

KYNAR 500 - FLUOROPOLYMER FINISHES ARE STANDARD ON ALL PREFINISHED PRODUCTS.

KYNAR 500® is a registered trademark of Atochem of North America, Inc.
GALVALUM® is a registered trademark of Bethlehem Steel.



metal worx



Systems Inc.

SL1500 Panel