


Panels will be produced with striated stiffening, as shown, unless an option is marked.

- Option for smooth surface (NO STIFFENING)
- Option for pan stiffening


*MODEL SS1500 1-1/2" DOUBLE / SINGLE -LOCK*

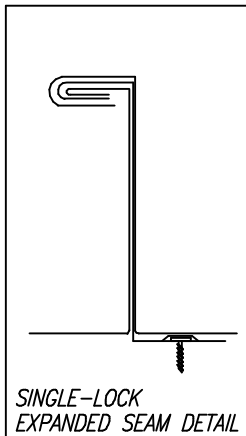

*SINGLE-LOCK  
EXPANDED SEAM DETAIL*

ADVANTAGES :

- MECHANICAL SEAM ENGAGEMENT PREVENTS MOISTURE PENETRATION AND ALLOWS FOR THERMALLY DRIVEN EXPANSION AND CONTRACTION
- EXCEEDS 200 lb> SEAM PULL-OFF TEST
- CONSEALED FASTENED CLIP ANCHORAGE

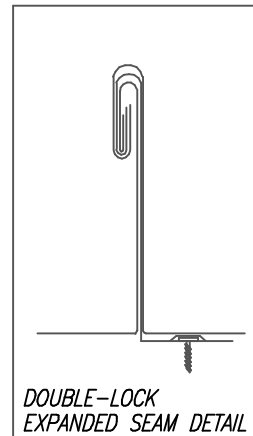

*DOUBLE-LOCK  
EXPANDED SEAM DETAIL*

STANDARD PRODUCT OFFERING  
SEAM - ON CENTERS

20"  
16"  
12"

Custom seam on centers available upon request. Consult METAL WORX for more information.

AVAILABLE BASE SHEET MATERIALS

- 24 Gauge HOT DIPPED GALVANIZED G-90
- 24 Gauge GALVALUME
- .032 ALUMINUM
- 16 oz. COLD ROLLED COPPER
- 20 oz. COLD ROLLED COPPER

PERFORMANCE STANDARDS

- ASTM E-1592 Wind Uplift
- ASTM E-1646 Water Penetration
- ASTM E-1680 Air Infiltration
- UL 580 Class 90

AVAILABLE FINISH SYSTEM

KYNAR 500 - FLUOROPOLYMER FINISHES ARE STANDARD ON ALL PREFINISHED PRODUCTS.

KYNAR 500® is a registered trademark of Atochem of North America, Inc.  
GALVALUM® is a registered trademark of Bethlehem Steel.



metal worx



Systems Inc.

SS1500 Panel