


2" SINGLE/DOUBLE LOCK PANEL




Panels will be produced with striated stiffening, as shown, unless an option is marked.

Factory applied inseam sealant

- Option for smooth surface (NO STIFFENING)
- Option for Pencil Rib Stiffeners (Not Shown)

MODEL SS2000 2" SINGLE / DOUBLE - LOCK


*Factory applied seam sealant is available, when required by specifications, and will be applied to the inside of the female leg. The factory applied sealant will be a non-skinning butyl sealant as recommended by forming machine manufacturer

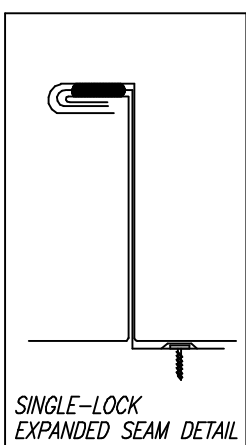

SINGLE-LOCK
EXPANDED SEAM DETAIL

ADVANTAGES :

- POSITIVE SEAM ENGAGEMENT
- SEAM IS MECHANICALLY LOCKED ON SITE
- EXCEEDS 200 lb> SEAM PULL-OFF TEST
- PREVENTS MOISTURE SEEPAGE
- ALLOWS FOR FREEZE-THAW EXPANSION AND CONTRACTION

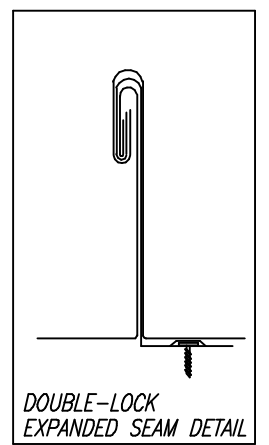

DOUBLE-LOCK
EXPANDED SEAM DETAIL

STANDARD PRODUCT OFFERING SEAM - ON CENTERS

- 12"
- * 16"
- 18"

* Custom seam on centers available upon request. Consult METAL WORX for more information.

AVAILABLE BASE SHEET MATERIALS

- 22 & 24 Gauge HOT DIPPED GALVANIZED G-90
- 22 & 24 Gauge GALVALUME
- .032 & .040 ALUMINUM
- 16 oz. COLD ROLLED COPPER and BRASS
- 20 oz. COLD ROLLED COPPER and BRASS

PERFORMANCE STANDARDS

- UL580, Class I-90 wind uplift rated
- ASTM E 1680 Air infiltration
- ASTM E 1646 Water penetration
- ASTM E 1592 Air Uplift
- Thermal Testing @ 100,000 Cycles

AVAILABLE FINISH SYSTEM

KYNAR 500 - FLUOROPOLYMER FINISHES ARE STANDARD ON ALL PREFINISHED PRODUCTS.

KYNAR 500® is a registered trademark of Atochem of North America, Inc.
GALVALUM® is a registered trademark of Bethlehem Steel.



metal worx



Systems Inc.

SS2000 Panel