



2 3/4" SINGLE LOCK PANEL

Panels will be produced with striated stiffening, as shown, unless an option is marked.

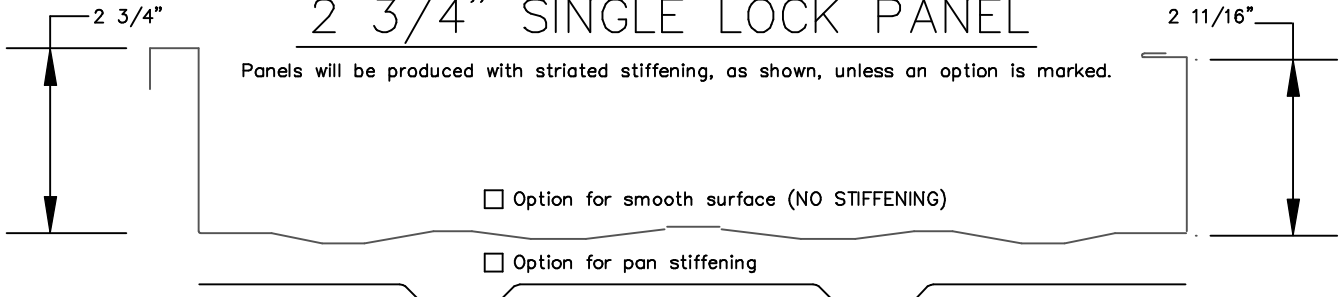

MODEL SS27500 2-3/4" SINGLE - LOCK

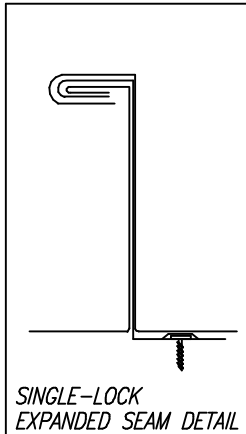

ADVANTAGES :

- MECHANICAL SEAM ENGAGEMENT PREVENTS MOISTURE PENETRATION AND ALLOWS FOR THERMALLY DRIVEN EXPANSION AND CONTRACTION
- EXCEEDS 200 lb> SEAM PULL-OFF TEST
- CONSEALED FASTENED CLIP ANCHORAGE

STANDARD PRODUCT OFFERING
SEAM - ON CENTERS
16"

Custom seam on centers available upon request. Consult METAL WORX for more information.

AVAILABLE BASE SHEET MATERIALS

- 22 TO 24 Gauge HOT DIPPED GALVANIZED G-90
- 22 TO 24 Gauge GALVALUME
- .022 / .032 / .040 AND UP TO .067 ALUMINUM
- 16 oz. COLD ROLLED COPPER
- 20 oz. COLD ROLLED COPPER

PERFORMANCE STANDARDS

- UL 580 Class 90
- ASTM E-1680 Air Infiltration
- ASTM E-1646 Water Penetration

AVAILABLE FINISH SYSTEM

KYNAR 500 - FLUOROPOLYMER FINISHES ARE STANDARD ON ALL PREFINISHED PRODUCTS.

KYNAR 500® is a registered trademark of Atochem of North America, Inc.
GALVALUM® is a registered trademark of Bethlehem Steel.



metal worx



Systems Inc.

SS27500 Panel