


SOFFIT & WALL PANEL PROFILE

MODEL SW 1000 SOFFIT & WALL PANEL

Soffit/Wall panels will be produced without stiffeners or perforations unless an option is checked.

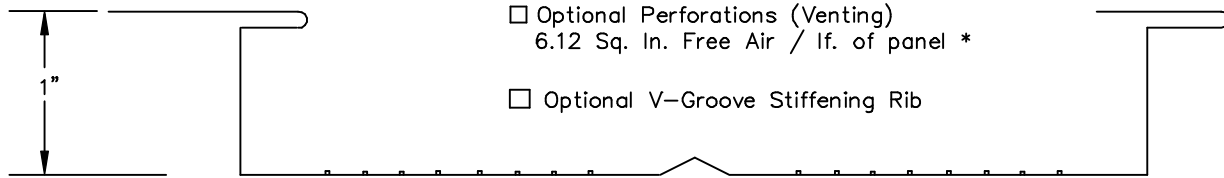

(*ie: if the panel is 12" wide and 12" long the free air ventilation = 6.12 Sq. In.)

ADVANTAGES :

- POSITIVE TONGUE & GROOVE ENGAGEMENT
- CONCEALED FASTENING THROUGH FEMALE FLANGE
- JOINT DESIGN LIMITS MOISTURE INCURRENCE
- ALLOWS FOR FREEZE-THAW EXPANSION & CONTRACTION

PRODUCT OFFERINGS:

- 20" WIDTH - ONE OR TWO STIFFENING RIBS
- 12" WIDTH - SMOOTH OR W/ONE STIFFENING RIB
- OPTIONAL VENTILATION BY ONE OR TWO PERFORATION SETS

Custom seam on centers available upon request. Consult METAL WORX for more information.

AVAILABLE BASE SHEET MATERIALS

- 24 Gauge HOT DIPPED GALVANIZED G-90
- 24 Gauge GALVALUME
- .032" ALUMINUM
- 16 oz. COLD ROLLED COPPER
- 20 oz. COLD ROLLED COPPER

AVAILABLE FINISH SYSTEM

KYNAR 500 - FLUOROPOLYMER FINISHES ARE STANDARD ON ALL PREFINISHED PRODUCTS.
Optional commercial paint systems available upon request. Consult METAL WORX for more information.

KYNAR 500® is a registered trademark of Atochem of North America, Inc.
GALVALUM® is a registered trademark of Bethlehem Steel.



metal worx



Systems Inc.

SW1000 (1 of 7)